

EF 30 - 40 lt

EF 7 - 11 - 15 - 20 L mini pump

12170039 - 12170095 - 12170040
12170096




TECHNICAL SPECIFICATIONS:

- Max flow rate hourly 30- 40 lt/h
- Power supply 230V - 50Hz
- Alarm contact C-NO/NC 8A
- Power consumption 27 W
- Protection rating IP20
- Max noise level 50 - 51 dB[A]
- For air conditioners up to 40 kW
- Max. delivery 14 m for EF 30; 18 m for EF40
- Intake max 2 m vertical between floating body and pump
- Coperchio con guarnizione di tenuta e foro di sfiato
- Dimensione tubo 4 x 9,5 mm
- Dimensioni pompa L 108 x H 63 x P 38 mm
- Dimensioni corpo galleggiante L 91 - H 39 - P 34 mm

PACK COMPLETE WITH

- 1 pump body
- 1 floating body
- 2 double-sided adhesives for anchor plates
- 2 plates for pump / floating body anchoring
- 1 connection hose 1 m- Ø 6x9.5 mm
- 1 vent tube Ø 4x6 mm
- 1 connecting sleeve in rubber
- 1 removable wiring harness connector
- 1 sheet of instructions


EF 30 It

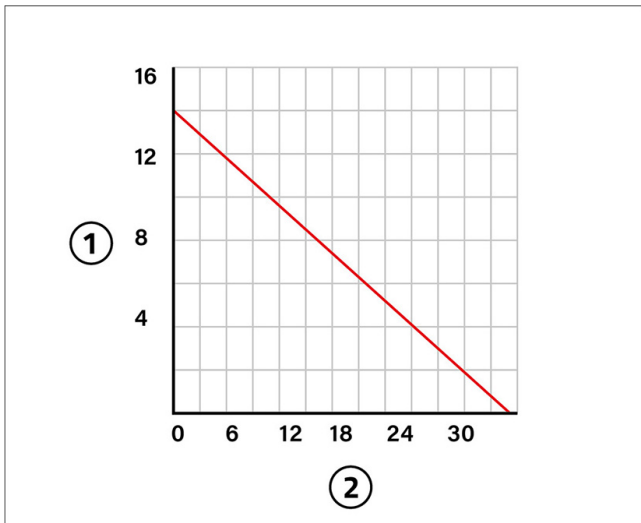

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- For air conditioners up to 30 kW
- Max. 14 m vertical delivery
- Power consumption 27 W
- Max noise level 50 [dB(A)]

EF 40 It

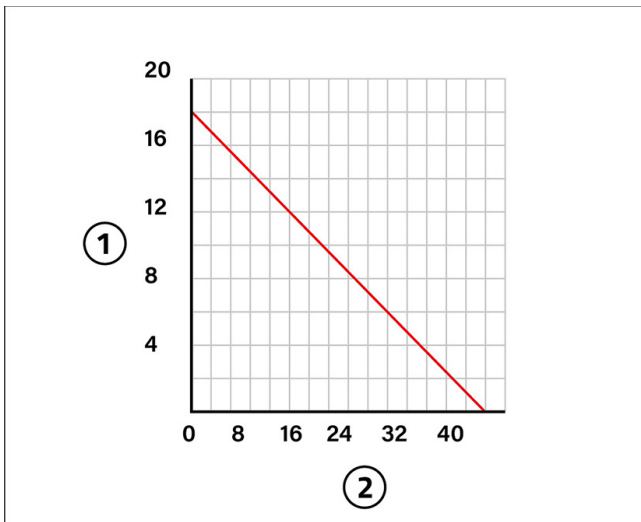

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- For air conditioners up to 40 kW
- Max. 18 m vertical delivery
- Power consumption 27 W
- Max noise level 51 [dB(A)]

WALL-MOUNTED APPLICATIONS

- wall splits
- consoles
- fan coils

CEILING-MOUNTED APPLICATIONS

- ceiling-mounted air conditioners
- ducted

ITEMS

CODE	DESCRIPTION
12170039	EASY FLOW 30 LT. MINI PUMP "EF30"
12170095	EASY FLOW 30 LT. MINI PUMP WITH VERTICAL CONNECTION EFV-30
12170040	EASY FLOW 40 LT. MINI PUMP "EF40"
12170096	EASY FLOW 40 LT. MINI PUMP WITH VERTICAL CONNECTION EFV40