

DATASHEET

rev. 00 - 5/11/2022


Insulated plenum with upper coupler for linear diffuser with rotary deflector 1 slot

PWD400342 - PWD400343 - PWD400344
PWD400345 - PWD400346



TECHNICAL SPECIFICATIONS:

- Insulated galvanized sheet
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars supplied
- Screw kit for fastening the supplied linear diffuser

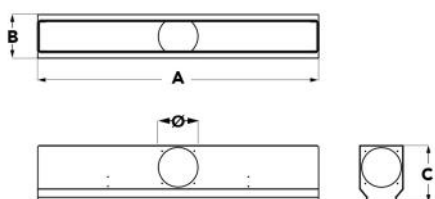

DIMENSIONS

| CODE | DIMENSION A [mm] | DIMENSION B [mm] | DIMENSION C [mm] | NO. OF COLLARS SUPPLIED / MOD. |
|-----------|------------------|------------------|------------------|--------------------------------|
| PWD400342 | 630 | 105 | 215 | 1 pc. / E5 (Ø150) |
| PWD400343 | 830 | 105 | 215 | 1 pc. / E5 (Ø150) |
| PWD400344 | 1030 | 105 | 215 | 1 pc. / E5 (Ø150) |
| PWD400345 | 1530 | 105 | 215 | 1 pc. / E5 (Ø150) |
| PWD400346 | 2030 | 105 | 215 | 2 pc. / E5 (Ø150) |

ITEMS

| CODE | DESCRIPTION |
|-----------|--|
| PWD400342 | INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.600 |
| PWD400343 | INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.800 |
| PWD400344 | INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.1000 |
| PWD400345 | INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.1500 |
| PWD400346 | INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.2000 |