

## PROAIR MULTI ZONE

serranda circolare motorizzata / bypass  
circolare motorizzato per sistema

GAD300019 - GAD300020




### TECHNICAL SPECIFICATIONS:

- Removable motor that can be positioned at: 0° - 90° - 180° - 270° - 360°
- Made of anti-condensation plastic
- Ensures thermal insulation between the inner and outer surfaces

### FUNCTIONS

- The motorised circular dampers for the "ProAir Multizone" system integrate perfectly into new and existing ducted systems, communicating directly with the system control unit.
- The dampers connect to each other by means of the cascading system
- The connection cable used is of the 8-wire telephone type with rj45 plug connection, present in this catalogue in different sizes already with wired connector.
- Appropriately configured using the POLARIS control units, the damper can take on the function of a motorised circular bypass.
- The automatic or manual management of the damper allows the throttle to move to one of the 4 positions pre-set by the system: 0%, 33%, 66% and 100%.

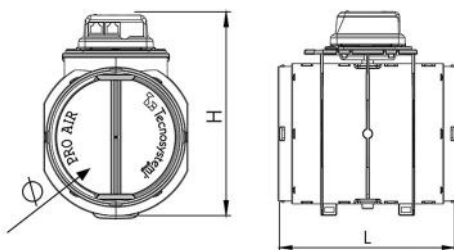

### DIMENSIONS

CODE	Ø COUPLER [mm]	H [mm]	L [mm]	MAX. AIR FLOW RATE [m³/h]
GAD300019	150	218	154	388
GAD300020	200	268	204	678

## ITEMS

CODE	DESCRIPTION
GAD300019	MOTORISED CIRCULAR DAMPER/MOTORISED CIRCULAR BY-PASS Ø150
GAD300020	MOTORISED CIRCULAR DAMPER/MOTORISED CIRCULAR BY-PASS Ø200