

DATASHEET

rev. 00 - 24/10/2022

STAR POINT

motorised delivery nozzle complete with telescopic plenum for low-prevalence ducted units

GAD200021 - GAD200022 - GAD200023



DESCRIPTION

The "Star" delivery nozzle is designed to meet the functional and aesthetic needs in the installations of low-prevalence indoor units.

The "Star" delivery nozzle opens when the machine is switched on and closes when it is switched off, without having to make electrical connections between the machine and the nozzle itself.


Ideal for hotels, hotels, restaurants, etc.

TECHNICAL SPECIFICATIONS:

- White painted aluminium
- Automatic opening in presence of air flow, automatic closure in absence of air flow
- Equipment: plenum for connection to low hydraulic head ducted units
- Power supply 220 V
- Built-in power supply included

Telescopic plenum in electro-galvanised sheet th 0.8 mm coated externally and internally with aluminised insulation th 10mm for connection to low-head ducted units.

DIMENSIONS

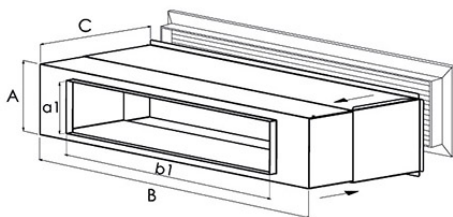

DELIVERY NOZZLE DIMENSIONS

CODE	EXTERNAL FRAME NOZZLE [mm]	WALL INSTALLATION HOLE [mm]
GAD200021	732 x 182	700 x 150
GAD200022	932 x 182	900 x 150
GAD200023	932 x 232	900 x 200

PLENUM DIMENSIONS TELESCOPIC

CODE	TELESCOPIC PLENUM HEIGHT A [mm]	TELESCOPIC PLENUM WIDTH B [mm]	MIN/MAX DEPTH C [mm]	MACHINE MOUTH COUPLING HEIGHT a1 [mm]	WIDTH OF MACHINE MOUTH COUPLING b1 [mm]
GAD200021	140	690	285 - 430	ON REQUEST MAX 135	ON REQUEST MAX 685
GAD200022	140	890	285 - 430	ON REQUEST MAX 135	ON REQUEST MAX 885
GAD200023	190	890	285 - 430	ON REQUEST MAX 185	ON REQUEST MAX 885

ITEMS

CODE	DESCRIPTION
GAD200021	"STAR POINT" WHITE PAINTED ELECTRIC SUPPLY GRILLE, WITH TELESCOPIC PLENUM FOR LOW HYDRAULIC HEAD DUCTED UNITS - 700x150
GAD200022	"STAR POINT" WHITE PAINTED ELECTRIC SUPPLY GRILLE, WITH TELESCOPIC PLENUM FOR LOW HYDRAULIC HEAD DUCTED UNITS - 900x150
GAD200023	"STAR POINT" WHITE PAINTED ELECTRIC SUPPLY GRILLE, WITH TELESCOPIC PLENUM FOR LOW HYDRAULIC HEAD DUCTED UNITS - 900x200